4 M SRAM (512-kword \times 8-bit)

HITACHI

ADE-203-1212B (Z) Rev. 2.0 May. 14, 2001

Description

The Hitachi HM628512C is a 4-Mbit static RAM organized 512-kword \times 8-bit. It realizes higher density, higher performance and low power consumption by employing CMOS process technology (6-transistor memory cell). The device, packaged in a 525-mil SOP (foot print pitch width) or 400-mil TSOP TYPE II or 600-mil plastic DIP, is available for high density mounting. The HM628512C is suitable for battery backup system.

Features


- Single 5 V supply
- Access time: 55/70 ns (max)
- Power dissipation
 - Active: 10 mW/MHz (typ)
 - Standby: 4 µW (typ)
- Completely static memory. No clock or timing strobe required
- Equal access and cycle times
- Common data input and output: Three state output
- Directly TTL compatible: All inputs and outputs
- Battery backup operation



Ordering Information

Type No.	Access time	Package
HM628512CLP-5 HM628512CLP-7	55 ns 70 ns	600-mil 32-pin plastic DIP (DP-32)
HM628512CLP-5SL	55 ns	_
HM628512CLFP-5 HM628512CLFP-7	55 ns 70 ns	525-mil 32-pin plastic SOP (FP-32D)
HM628512CLFP-5SL	55 ns	_
HM628512CLTT-5 HM628512CLTT-7	55 ns 70 ns	400-mil 32-pin plastic TSOP II (TTP-32D)
HM628512CLTT-5SL	55 ns	_
HM628512CLRR-5 HM628512CLRR-7	55 ns 70 ns	400-mil 32-pin plastic TSOP II reverse (TTP-32DR)
HM628512CLRR-5SL	55 ns	_


Pin Arrangement

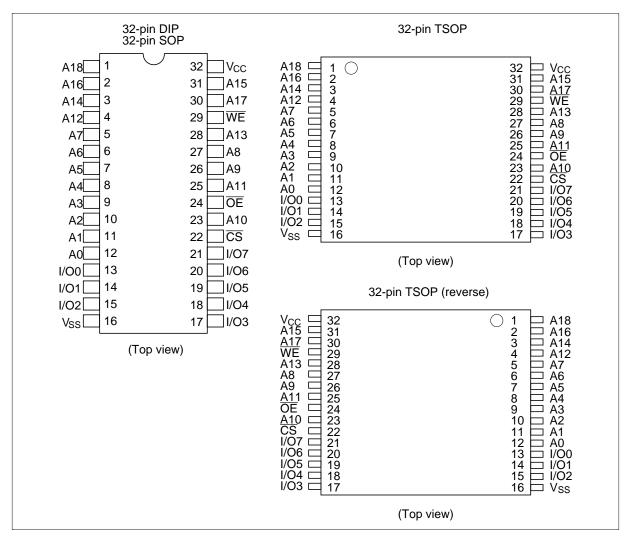

Pin Description

Pin name	Function
A0 to A18	Address input
I/O0 to I/O7	Data input/output
CS	Chip select
ŌĒ	Output enable
WE	Write enable
V _{cc}	Power supply
V _{ss}	Ground

Block Diagram

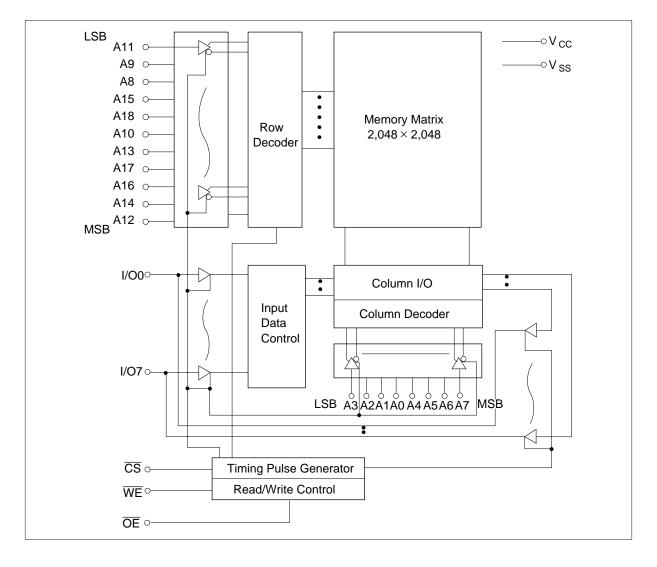

Function Table

WE	CS	OE	Mode	V _{cc} current	Dout pin	Ref. cycle
×	Н	×	Not selected	I _{SB} , I _{SB1}	High-Z	_
Н	L	Н	Output disable	I _{cc}	High-Z	_
Н	L	L	Read	I _{cc}	Dout	Read cycle
L	L	Н	Write	I _{cc}	Din	Write cycle (1)
L	L	L	Write	I _{cc}	Din	Write cycle (2)

Note: X: H or L

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Power supply voltage	V _{cc}	-0.5 to +7.0	V
Voltage on any pin relative to V_{ss}	V _T	-0.5^{*1} to V _{cc} + 0.3 ^{*2}	V
Power dissipation	P _T	1.0	W
Operating temperature	Topr	-20 to +70	°C
Storage temperature	Tstg	-55 to +125	°C
Storage temperature under bias	Tbias	-20 to +85	°C

Notes: 1. V_{τ} min: -3.0 V for pulse half-width \leq 30 ns.

2. Maximum voltage is 7.0 V.

Recommended DC Operating Conditions (Ta = -20 to $+70^{\circ}$ C)

Parameter	Symbol	Min	Тур	Max	Unit
Supply voltage	V _{cc}	4.5	5.0	5.5	V
	V _{ss}	0	0	0	V
Input high voltage	V _{IH}	2.2	_	V _{cc} + 0.3	V
Input low voltage	V _{IL}	-0.3*1		0.8	V

Note: 1. V_{IL} min: -3.0 V for pulse half-width \leq 30 ns.

DC Characteristics

Parameter		Symbol	Min	Typ*1	Max	Unit	Test conditions
Input leakage current		I _{LI}	_	_	1	μA	Vin = V_{ss} to V_{cc}
Output leakage curren	t	_{lo}		_	1	μA	$\overline{\frac{CS}{WE}} = V_{IH} \text{ or } \overline{OE} = V_{IH} \text{ or}$ $\overline{WE} = V_{IL}, V_{I/O} = V_{SS} \text{ to } V_{CC}$
Operating power supply current: DC		I _{cc}		1.5	3	mA	$\overline{CS} = V_{IL},$ others = V_{IH}/V_{IL} , $I_{I/O} = 0$ mA
Operating power supply current	HM628512C-5	I _{CC1}	—	8	25	mA	$\label{eq:linear} \begin{array}{l} \mbox{Min cycle, duty} = 100\% \\ \hline \mbox{CS} = V_{\rm IL}, \mbox{others} = V_{\rm IH}/V_{\rm IL} \\ I_{\rm I/O} = 0 \mbox{ mA} \end{array}$
	HM628512C-7	I _{CC1}	_	7	25	mA	
Operating power supply current		I _{CC2}	—	2	5	mA	$\begin{array}{l} Cycle \ time = 1 \ \mu s, \\ duty = 100\% \\ I_{_{UO}} = 0 \ mA, \ \overline{CS} \leq 0.2 \ V \\ V_{_{IH}} \geq V_{_{CC}} - 0.2 \ V, \ V_{_{IL}} \leq 0.2 \ V \end{array}$
Standby power supply	current: DC	I _{SB}		0.1	0.5	mA	$\overline{\text{CS}} = \text{V}_{\text{IH}}$
Standby power supply current (1): DC		I _{SB1}		0.8*2	20* ²	μA	$Vin \ge 0 \text{ V}, \overline{CS} \ge V_{cc} - 0.2 \text{ V}$
			_	0.8*3	10* ³	μA	-
Output low voltage		V _{OL}			0.4	V	I _{oL} = 2.1 mA
Output high voltage		V _{OH}	2.4			V	I _{OH} = -1.0 mA

Notes: 1. Typical values are at V_{cc} = 5.0 V, Ta = +25°C and specified loading, and not guaranteed.

2. This characteristics is guaranteed only for L version.

3. This characteristics is guaranteed only for L-SL version.

Capacitance (Ta = $+25^{\circ}$ C, f = 1 MHz)

Parameter	Symbol	Тур	Max	Unit	Test conditions
Input capacitance*1	Cin	_	8	pF	Vin = 0 V
Input/output capacitance*1	C _{I/O}	_	10* ²	pF	$V_{I/O} = 0 V$

Notes: 1. This parameter is sampled and not 100% tested.

2. $C_{I/O}$ max = 12 pF only for HM628512CLP Series.

AC Characteristics (Ta = -20 to $+70^{\circ}$ C, V_{CC} = 5 V ± 10%, unless otherwise noted.)

Test Conditions

- Input pulse levels: 0.8 V to 2.4 V
- Input rise and fall time: 5 ns
- Input and output timing reference levels: 1.5 V
- Output load: 1 TTL Gate + C_L (100 pF) (HM628512C-7)
 - 1 TTL Gate + C_L (50 pF) (HM628512C-5)

(Including scope & jig)

Read Cycle

		HM628	8512C				
		-5		-7		_	
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Read cycle time	t _{RC}	55	_	70	_	ns	
Address access time	t _{AA}	_	55		70	ns	
Chip select access time	t _{co}		55		70	ns	
Output enable to output valid	t _{oe}	_	25	—	35	ns	
Chip selection to output in low-Z	t _{LZ}	10		10		ns	2
Output enable to output in low-Z	t _{oLZ}	5		5		ns	2
Chip deselection to output in high-Z	t _{HZ}	0	20	0	25	ns	1, 2
Output disable to output in high-Z	t _{oHz}	0	20	0	25	ns	1, 2
Output hold from address change	t _{он}	10	_	10	_	ns	

Write Cycle


		HM62	8512C				
		-5				-7	
Parameter	Symbol	Min	Мах	Min	Max	Unit	Notes
Write cycle time	t _{wc}	55		70	_	ns	
Chip selection to end of write	t _{cw}	50		60		ns	4
Address setup time	t _{AS}	0		0	_	ns	5
Address valid to end of write	t _{AW}	50		60		ns	
Write pulse width	t _{WP}	40		50		ns	3, 12
Write recovery time	t _{wR}	0	_	0	_	ns	6
WE to output in high-Z	t _{wHZ}	0	20	0	25	ns	1, 2, 7
Data to write time overlap	t _{DW}	25		30		ns	
Data hold from write time	t _{DH}	0		0	_	ns	
Output active from output in high-Z	t _{ow}	5		5		ns	2
Output disable to output in high-Z	t _{oHz}	0	20	0	25	ns	1, 2, 7

Notes: 1. t_{HZ}, t_{OHZ} and t_{WHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referred to output voltage levels.


- 2. This parameter is sampled and not 100% tested.
- 3. A write occurs during the overlap (t_{WP}) of a low CS and a low WE. A write begins at the later transition of CS going low or WE going low. A write ends at the earlier transition of CS going high or WE going high. t_{WP} is measured from the beginning of write to the end of write.
- 4. t_{cw} is measured from \overline{CS} going low to the end of write.
- 5. t_{AS} is measured from the address valid to the beginning of write.
- 6. t_{WR} is measured from the earlier of \overline{WE} or \overline{CS} going high to the end of write cycle.
- 7. During this period, I/O pins are in the output state so that the input signals of the opposite phase to the outputs must not be applied.
- 8. If the CS low transition occurs simultaneously with the WE low transition or after the WE transition, the output remain in a high impedance state.
- 9. Dout is the same phase of the write data of this write cycle.
- 10. Dout is the read data of next address.
- 11. If CS is low during this period, I/O pins are in the output state. Therefore, the input signals of the opposite phase to the outputs must not be applied to them.
- 12. In the write cycle with \overline{OE} low fixed, t_{WP} must satisfy the following equation to avoid a problem of data bus contention. $t_{WP} \ge t_{DW}$ min + t_{WHZ} max


Timing Waveforms

Read Timing Waveform $(\overline{WE}=V_{\rm IH})$

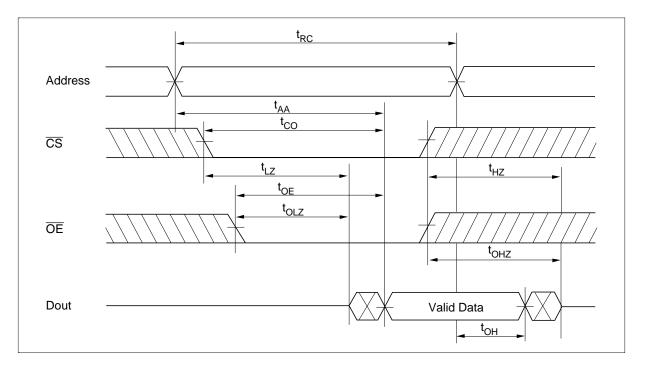

Write Timing Waveform (1) $(\overline{OE} \operatorname{Clock})$

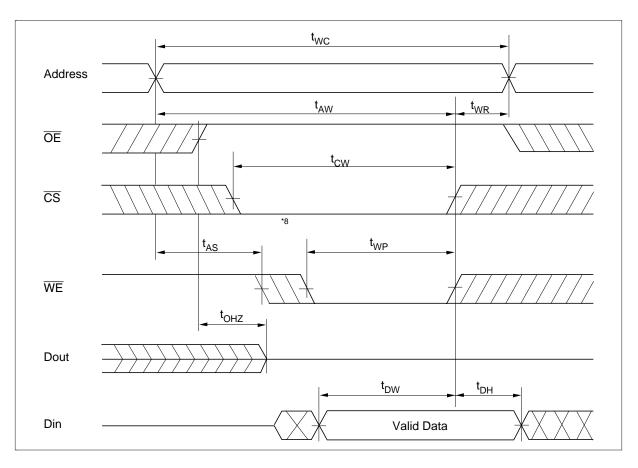

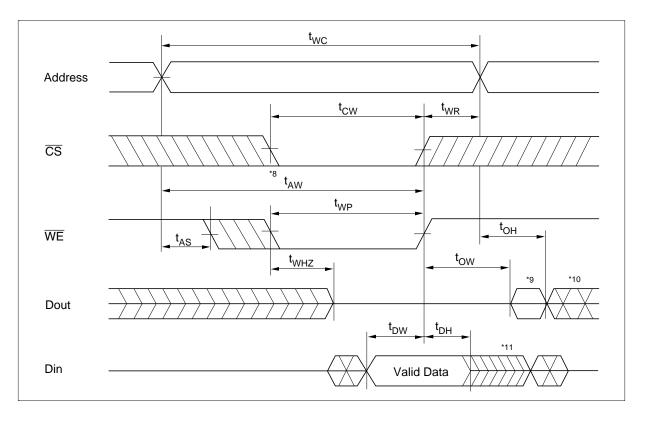

Write Timing Waveform (2) (OE Low Fixed)

Low V_{cc} Data Retention Characteristics (Ta = -20 to +70°C)

Parameter	Symbol	Min	Тур	Мах	Unit	Test conditions*3
V_{cc} for data retention	V_{DR}	2	_	_	V	$\overline{\text{CS}} \ge \text{V}_{\text{cc}} - 0.2 \text{ V}, \text{ Vin} \ge 0 \text{ V}$
Data retention current	I _{CCDR}	_	0.8*4	20*1	μΑ	$\frac{V_{cc}}{CS} = 3.0 \text{ V}, \text{ Vin} \ge 0 \text{ V}$ $\frac{V_{cc}}{CS} \ge V_{cc} - 0.2 \text{ V}$
		_	0.8*4	10* ²	μA	_
Chip deselect to data retention time	t _{CDR}	0	_	_	ns	See retention waveform
Operation recovery time	t _R	t _{RC} *5	_		ns	—

Notes: 1. For L-version and 10 μ A (max.) at Ta = -20 to +40°C.


2. For L-SL-version and 3 μ A (max.) at Ta = -20 to +40 °C.

3. CS controls address buffer, WE buffer, OE buffer, and Din buffer. In data retention mode, Vin levels (address, WE, OE, I/O) can be in the high impedance state.

4. Typical values are at V_{cc} = 3.0 V, Ta = +25°C and specified loading, and not guaranteed.


5. t_{RC} = read cycle time.

Low V_{CC} Data Retention Timing Waveform (\overline{CS} Controlled)

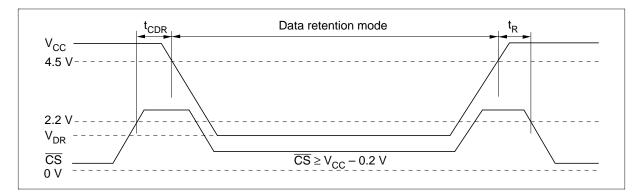


Package Dimensions

HM628512CLP Series (DP-32)

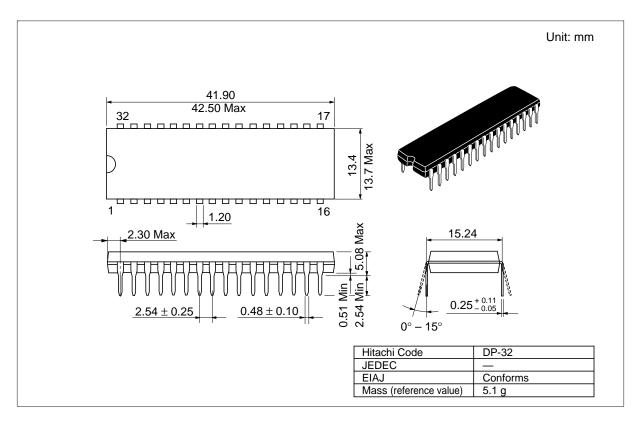


Package Dimensions (cont.)

HM628512CLFP Series (FP-32D)

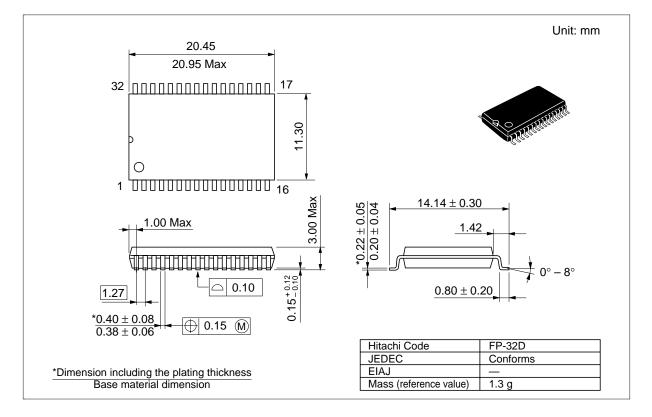


Package Dimensions (cont.)

HM628512CLTT Series (TTP-32D)

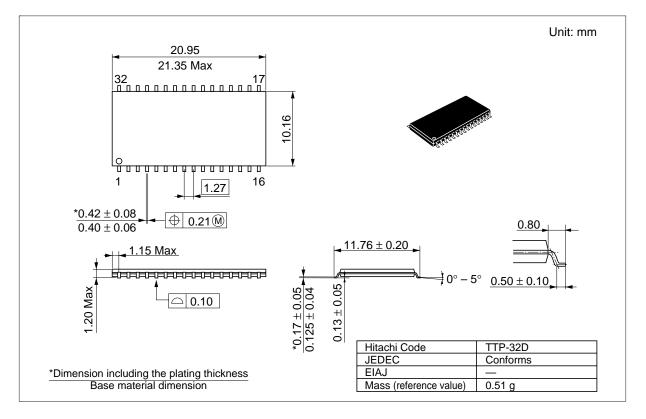

Package Dimensions (cont.)

HM628512CLRR Series (TTP-32DR)

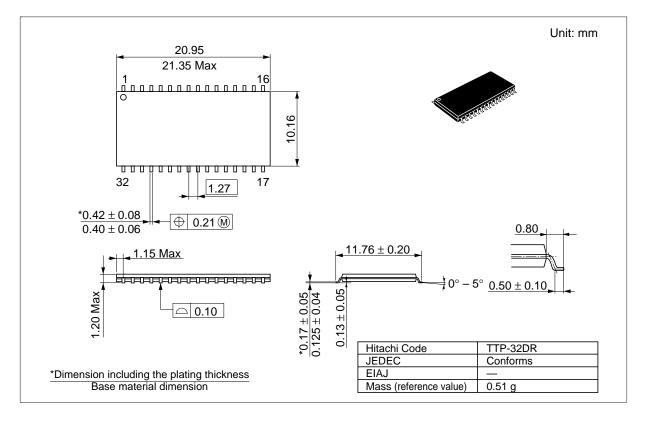

Cautions

- 1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
- 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
- 5. This product is not designed to be radiation resistant.
- 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
- 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

ITACHI Hitachi, I td.

Semiconductor & Integrated Circuits Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica Europe Asia	: http://semiconductor.hitachi.com/ : http://www.hitachi-eu.com/hel/ecg : http://sicapac.hitachi-asia.com
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive San Jose, CA 95134

Hitachi Europe Ltd. Electronic Components Group Whitebrook Park Lower Cookham Road Tel: <1> (408) 433-0223 Berkshire SL6 8YA, United Kingdom Fax: <65>-538-6933/538-8577 Tel: <44> (1628) 585000 Fax: <44> (1628) 585200

Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00

Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00 Singapore 049318 URL : http://www.hitachi.com.sg Hitachi Asia I td (Taipei Branch Office) 4/F. No. 167. Tun Hwa North Road

Hung-Kuo Building Taipei (105), Taiwan Tel : <886>-(2)-2718-3666 Fax: <886>-(2)-2718-8180 Telex : 23222 HAS-TP URL : http://www.hitachi.com.tw Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower World Finance Centre Harbour City, Canton Road Tsim Sha Tsui, Kowloon Hong Kong Tel : <852>-(2)-735-9218 Fax : <852>-(2)-730-0281 URL : http://semiconductor.hitachi.com.hk

Copyright © Hitachi, Ltd., 2001. All rights reserved. Printed in Japan. Colophon 4.0